

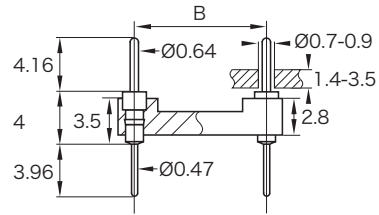


ハンダ用オープンフレーム

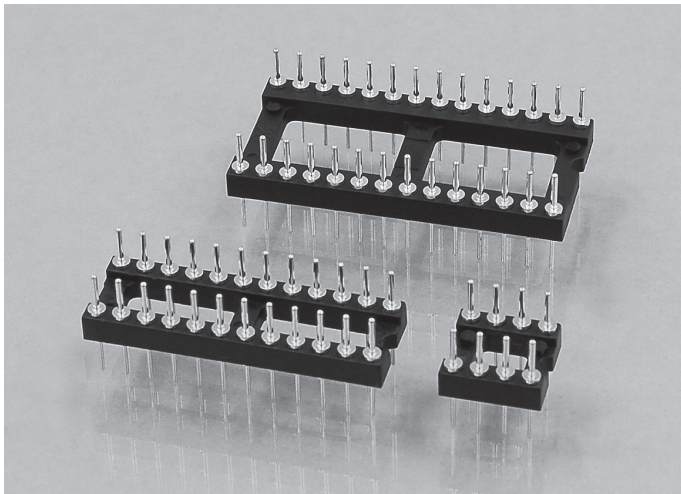

- DIPアダプタとして使用できます
- DIP ICパターンと合致し、DIPソケットへ挿入可能 (ピン径: Ø0.47mm)

仕様 インシュレーター: ガラス封入熱可塑性樹脂ポリエステル、UL94 V-0、黒色、PCT-GF30FR
 コンタクト材質: CuZn36Pb3 (C36000)
 適合ピン径: Ø0.47mm
 機械的寿命: 100回(最低)
 定格電流: 1A
 耐電圧: 1,000Vrms(最低)

寸法 (mm)			1レール 入り数	シリーズ ピン 数	R150-10	R150-80
A	B	C			0.25µm金 型番	純錫 型番
12.6	5.08	7.6	42	10	R150-10-210	R150-80-210
5.0	7.62	10.1	108	4	R150-10-304	R150-80-304
7.6	7.62	10.1	71	6	R150-10-306	R150-80-306
10.1	7.62	10.1	53	8	R150-10-308	R150-80-308
12.6	7.62	10.1	42	10	R150-10-310	R150-80-310
15.2	7.62	10.1	—	12	R150-10-312	R150-80-312
17.7	7.62	10.1	30	14	R150-10-314	R150-80-314
20.3	7.62	10.1	26	16	R150-10-316	R150-80-316
22.8	7.62	10.1	23	18	R150-10-318	R150-80-318
25.3	7.62	10.1	21	20	R150-10-320	R150-80-320
27.9	7.62	10.1	19	22	R150-10-322	R150-80-322
30.4	7.62	10.1	17	24	R150-10-324	R150-80-324
35.5	7.62	10.1	15	28	R150-10-328	R150-80-328
25.3	10.16	12.6	21	20	R150-10-420	R150-80-420
27.9	10.16	12.6	19	22	R150-10-422	R150-80-422
30.4	10.16	12.6	17	24	R150-10-424	R150-80-424
35.5	10.16	12.6	15	28	R150-10-428	R150-80-428
40.6	10.16	12.6	13	32	R150-10-432	R150-80-432
12.6	15.24	17.7	—	10	R150-10-610	R150-80-610
30.4	15.24	17.7	17	24	R150-10-624	R150-80-624
35.5	15.24	17.7	15	28	R150-10-628	R150-80-628
40.6	15.24	17.7	13	32	R150-10-632	R150-80-632
45.7	15.24	17.7	11	36	R150-10-636	R150-80-636
50.6	15.24	17.7	10	40	R150-10-640	R150-80-640
53.1	15.24	17.7	10	42	R150-10-642	R150-80-642
60.8	15.24	17.7	8	48	R150-10-648	R150-80-648
81.1	22.86	25.3	6	64	R150-10-964	R150-80-964
使用ピン型番					R05001-10	R05001-80

●寸法の詳細図は159~161ページを参照。